
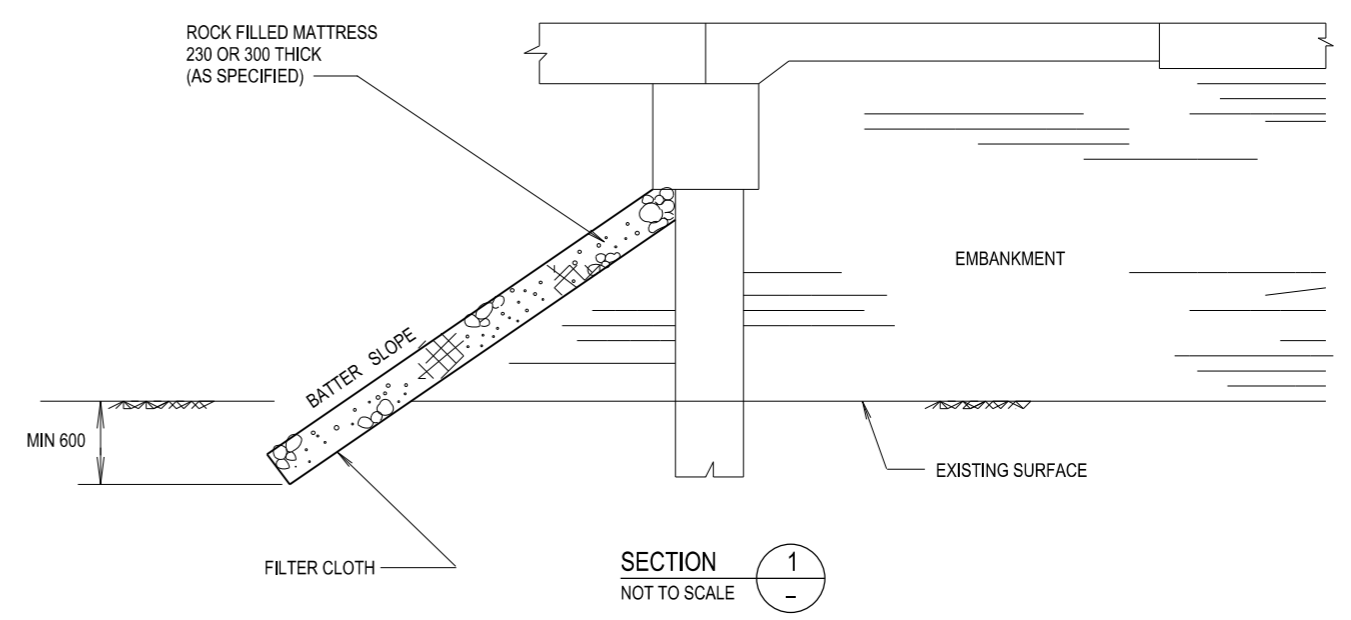
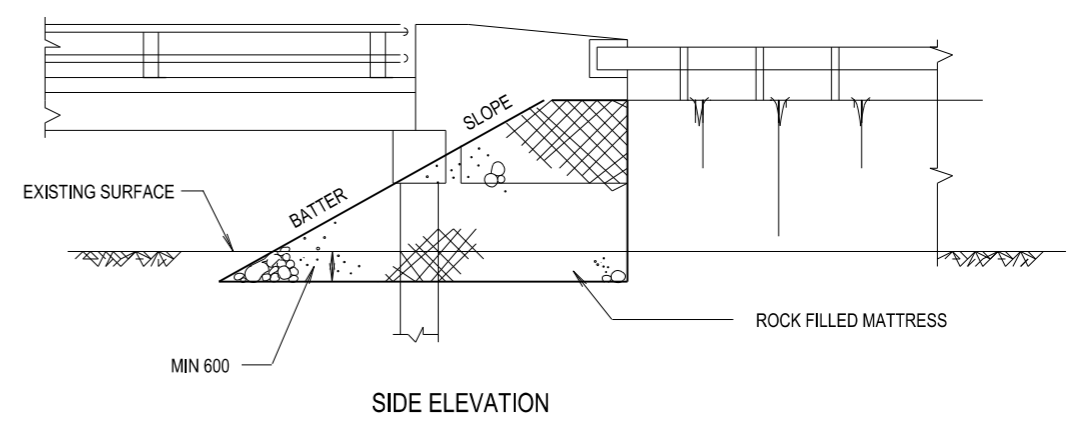
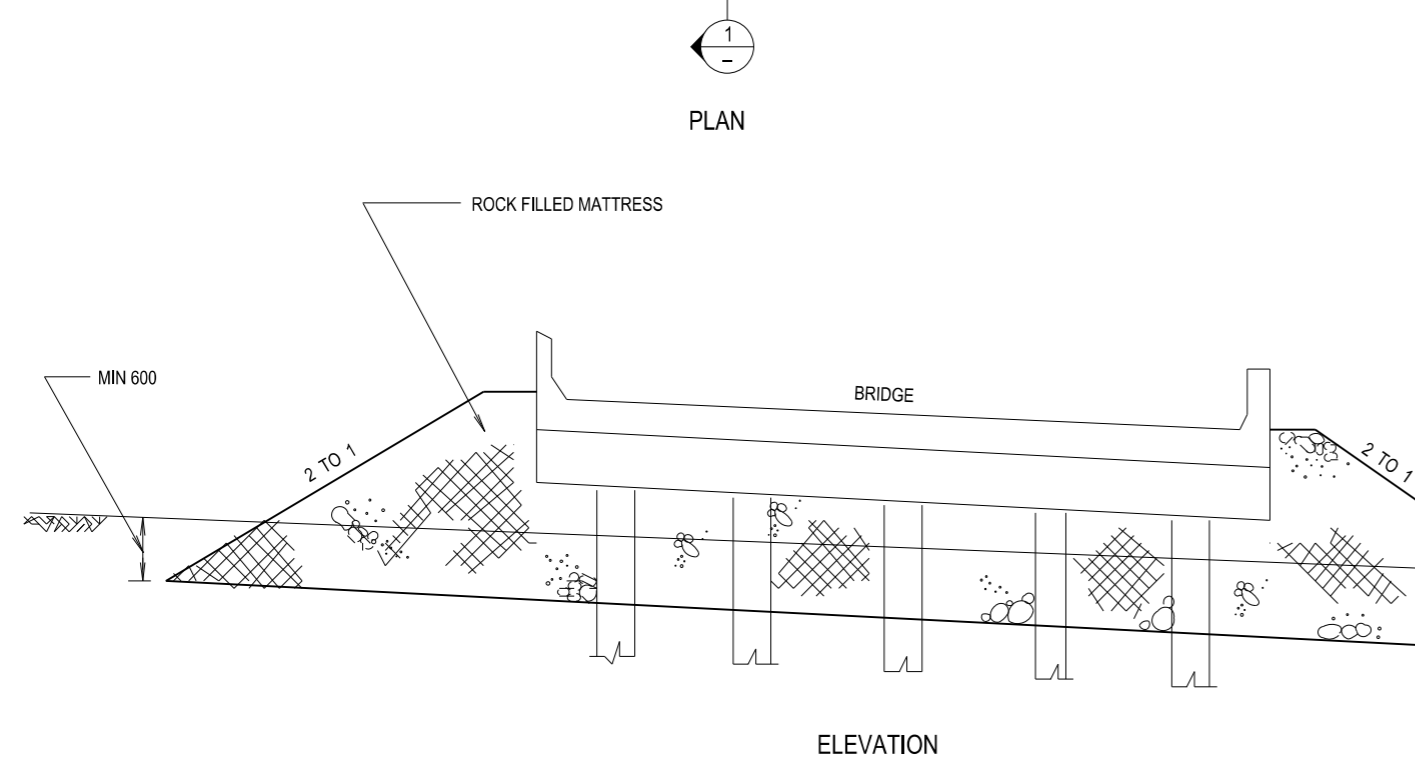


THIS DRAWING MAY BE PREPARED IN COLOUR AND MAY BE INCOMPLETE IF COPIED

50mm ON A3 SIZE ORIGINAL

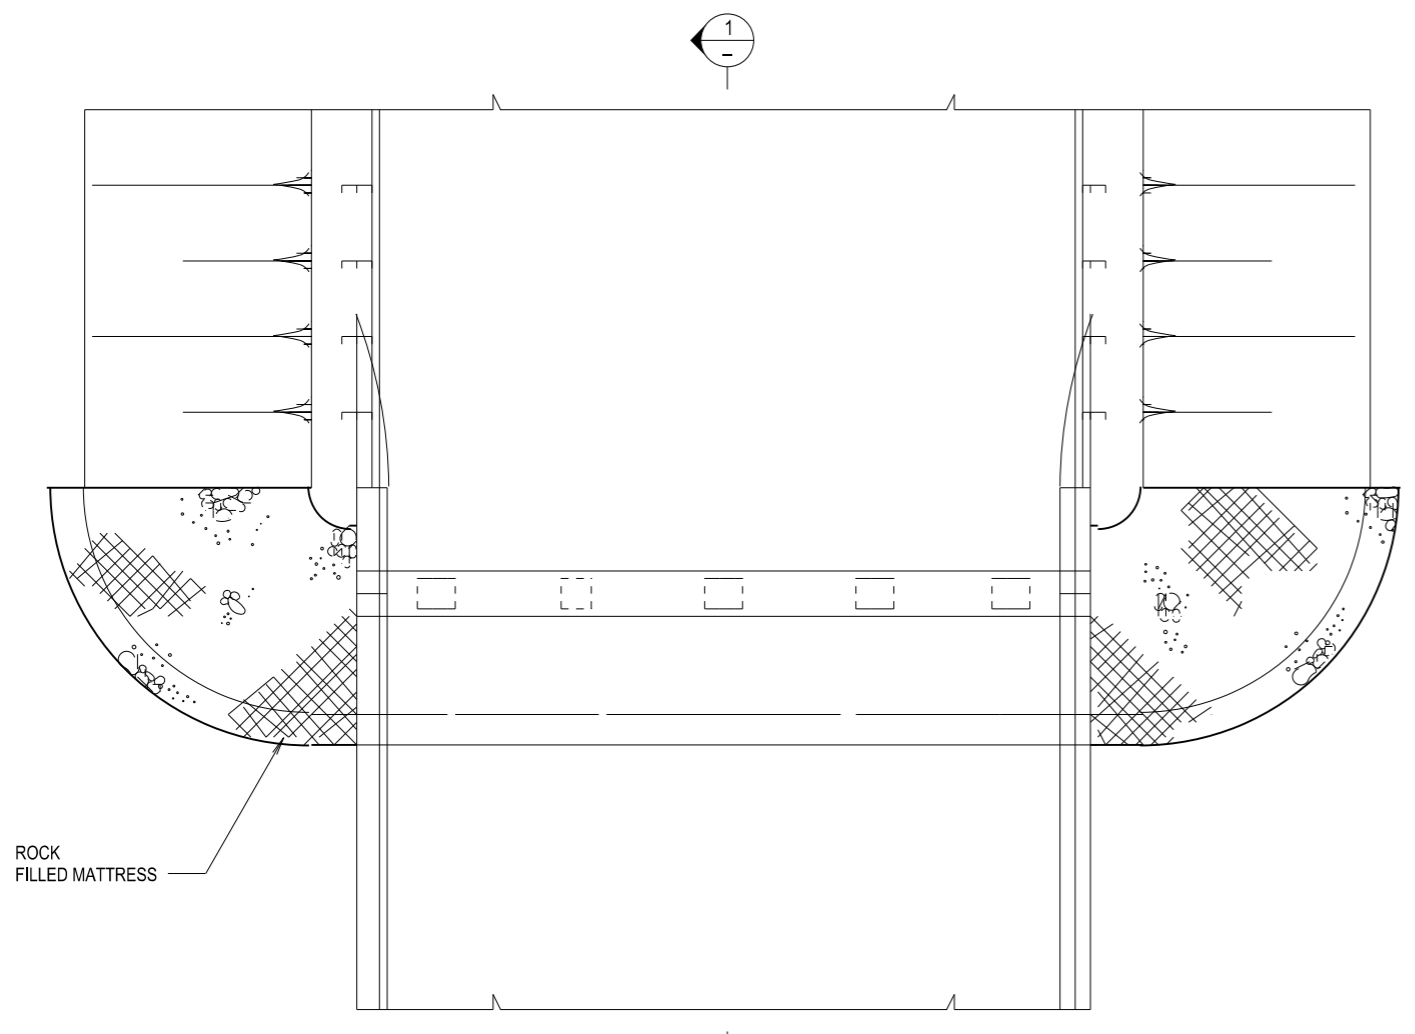

- NOTES**
1. SIZE OF ROCK FILL: 80 MINIMUM, 150 MAXIMUM.
 2. ROCK FILLED MATTRESS AND BATTER SLOPE TO BE IN ACCORDANCE WITH BRIDGE PLANS.
 3. MATTRESSES TO BE FABRICATED OF GALVANISED WIRE OR SYNTHETIC MESH.

QR CODE 			REV	DATE	AMENDMENT / REVISION DESCRIPTION	WVR No.	APPROVAL	ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN	CONTACT DETAILS SEND FEEDBACK ON THIS STANDARD DRAWING TO : technologystandards@rms.nsw.gov.au	ISSUED SFR MANAGER ROAD POLICY, SPECIFICATIONS & TECHNOLOGY	NSW GOVERNMENT Transport Roads & Maritime Services	STANDARD DRAWING ROAD DESIGN ENGINEERING R0400 EARTHWORKS SERIES SPILL THROUGH BATTER PROTECTION AT BRIDGE ABUTMENTS	A3
								SCALES ON A3 SIZE DRAWING	DATE 20.01.17	PREPARED BY ENGINEERING SERVICES ROAD POLICY, SPECIFICATIONS AND AND TECHNOLOGY	STANDARD DRAWING No. R0400-03	SHEET 1 OF 1	REV. -
											STATUS ISSUED	EDMS No. DS2014/005904	ORIGINAL ISSUE DATE JANUARY 2017