



END OR CORNER PANEL AND INTERMEDIATE PANEL

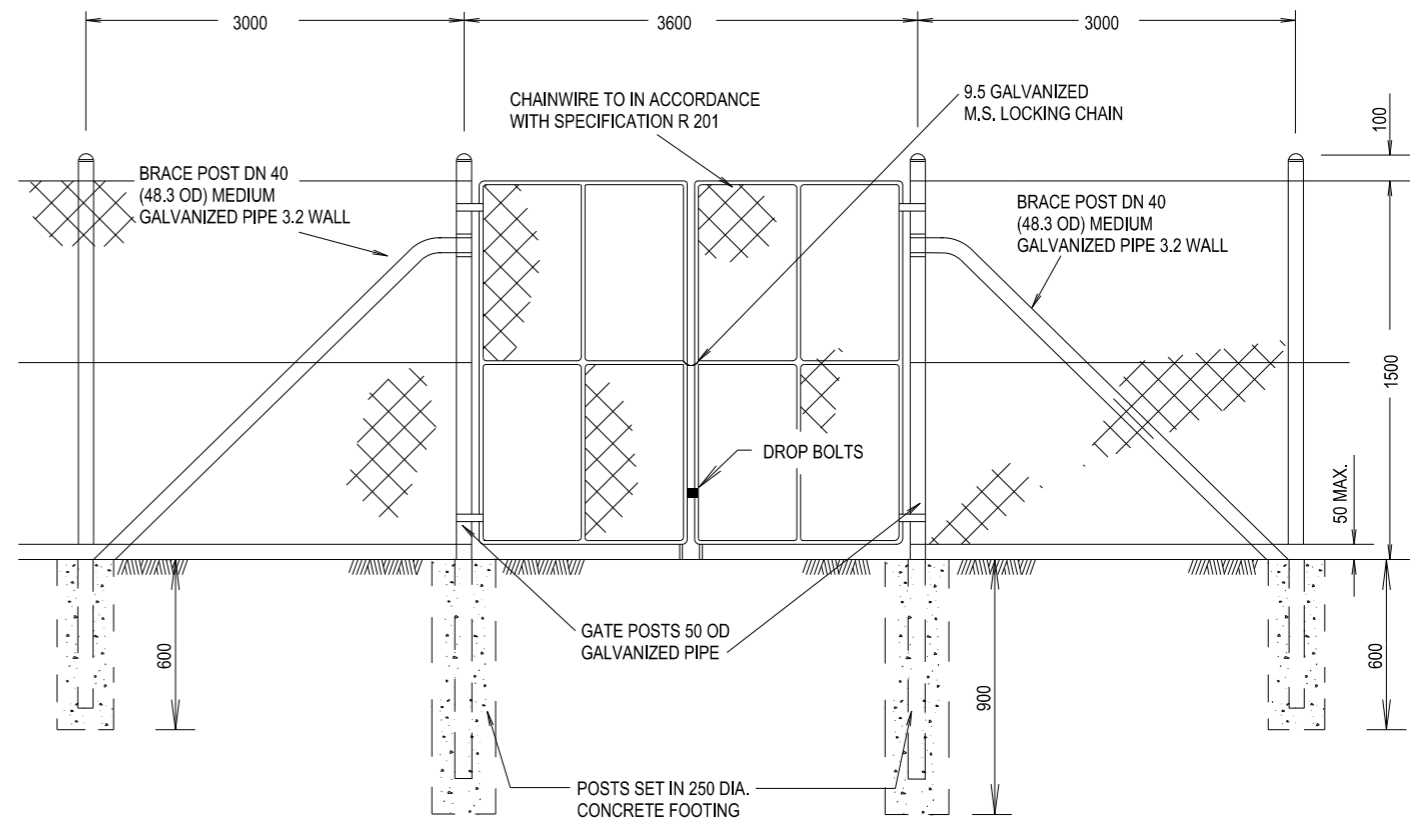

GATE

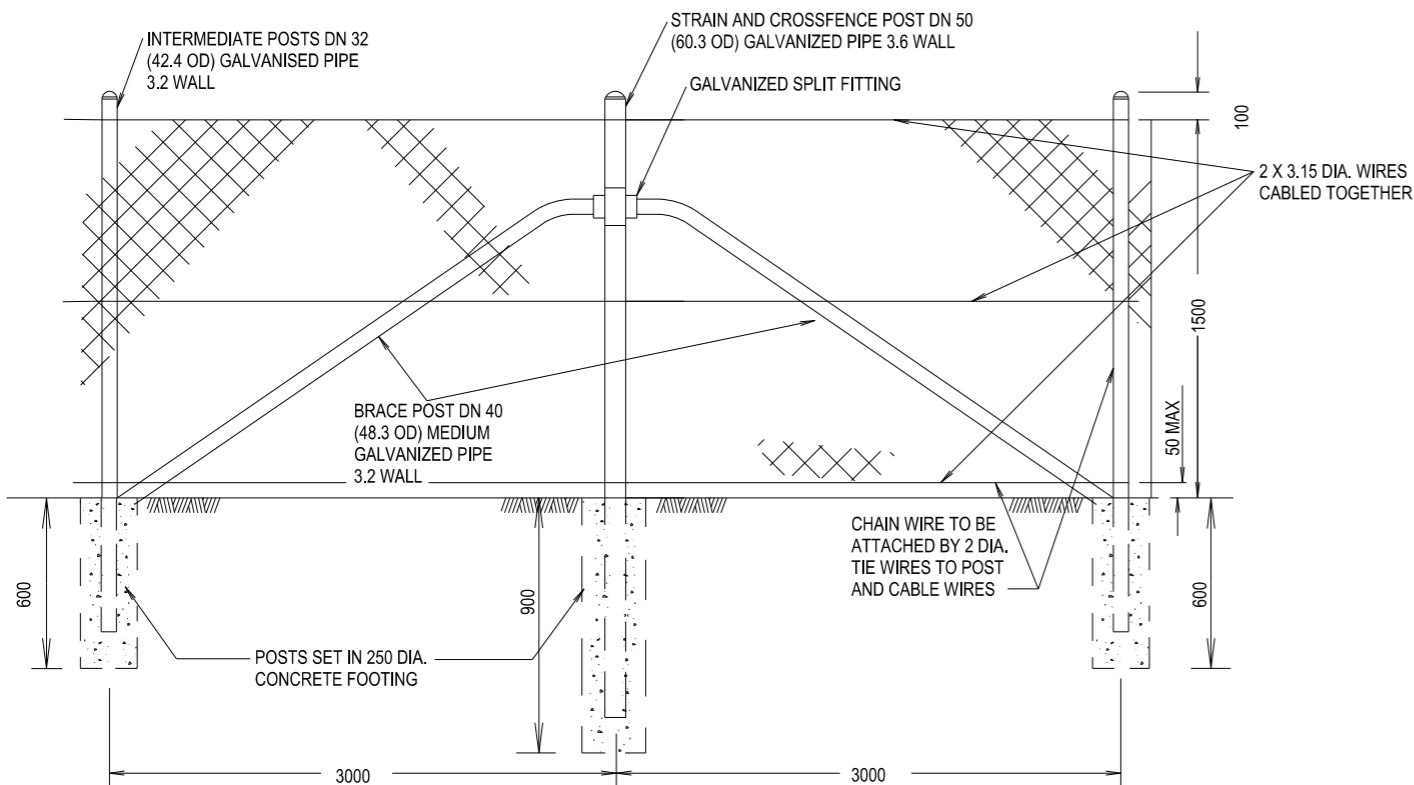

STRAIN POST - INTERMEDIATE POST
(AT MAX. INTERVAL 120 m) AND AT CROSSFENCE

NOTES

1. ALL POSTS WEATHER CAPPED.
2. CONCRETE FOOTINGS 20 MPa.
3. GATES TO BE FABRICATED FROM 34 OUTSIDE DIA. GALVANIZED PIPE.
4. JOINTS TO BE WELDED AND PAINTED WITH COLD GALVANIZED PAINT.
5. ALL FENCING MATERIALS TO BE IN ACCORDANCE WITH SPECIFICATION R 201
6. SPECIAL REQUIREMENTS MAY APPLY TO THE ERECTION PROCEDURES FOR FENCES INSTALLED NEAR HIGH VOLTAGE TRANSMISSION LINES. THE RELEVANT ELECTRICITY AUTHORITY SHOULD BE CONTACTED PRIOR TO THE INSTALLATION OF THE FENCE.

THIS DRAWING MAY BE PREPARED IN COLOUR AND MAY BE INCOMPLETE IF COPIED

50mm ON A3 SIZE ORIGINAL

0 5 10 15 20 25 30 35 40 45

QR CODE				SCAN TO CHECK DOCUMENT VER.				REV. DATE AMENDMENT / REVISION DESCRIPTION				WVR No. APPROVAL				ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN				ISSUED				STANDARD DRAWING ROAD DESIGN ENGINEERING R0800 FENCING SERIES MARSUPIAL PROOF FENCING WITH GATE DETAIL SHEET 1 OF 1 STANDARD DRAWING No. R0800-30 STATUS ISSUED EDMS No. DS2014/006017 ORIGINAL ISSUE DATE JANUARY 2017 © Roads and Maritime Services				A3	
												CONTACT DETAILS SEND FEEDBACK ON THIS STANDARD DRAWING TO : technologystandards@rms.nsw.gov.au DATE 20.01.17				TRANSPORT NSW GOVERNMENT Roads & Maritime Services PREPARED BY ENGINEERING SERVICES ROAD POLICY, SPECIFICATIONS AND AND TECHNOLOGY													