

NOTES

1. TOLERANCE OF ALL DIMENSIONS UNLESS OTHERWISE INDICATED:

- UP TO AND INCLUDING 100mm TO BE ±0.5mm.
- OVER 100mm TO BE ±1mm.
- ANGULAR TOLERANCE ±1°.


TOLERANCE OF THE FLAT STEEL OF BRACKET TO COMPLY WITH AS 3679.

2. ALL BURRS, SHARP EDGES & WELDING SCALE TO BE REMOVED BEFORE GALVANISING.

3. ALL WELDS TO BE CONTINUOUS FILLET IN ACCORDANCE WITH AS 1554 PART 1.

4. BRACKET TO BE HOT DIP GALVANISED IN ACCORDANCE WITH AS 1650.


5. ITEMS 2 TO 9 TO BE SUPPLIED FULLY ASSEMBLED AS SHOWN.

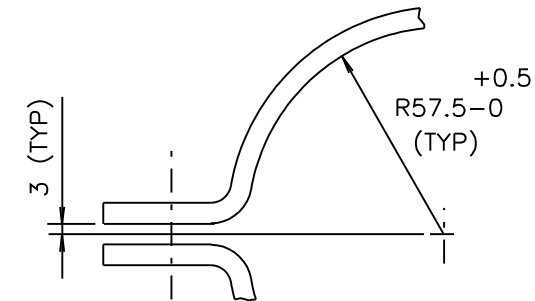

DETAIL A
2 : 1

ITEM	DESCRIPTION	MATERIAL	FINISH	QTY
9	HEX NUT M10 TO AS 1112	MILD STEEL	GALV TO AS 1214	2
8	SPRING WASHER M10 TO AS 1968	SPRING STEEL	GALV TO AS 1650	2
7	FLAT WASHER M10 LARGE SERIES TO AS 1237	MILD STEEL	GALV TO AS 1650	2
6	CUP HEAD SQUARE NECK BOLT M10 X 30 TO AS 1390	MILD STEEL	GALV TO AS 1650	2
5	HEX NUT M12 TO AS 1112	MILD STEEL	GALV TO AS 1214	2
4	SPRING WASHER M12 TO AS 1968	SPRING STEEL	GALV TO AS 1650	2
3	FLAT WASHER M12 TO AS 1237	MILD STEEL	GALV TO AS 1650	4
2	HEX HD SCREW M12 x 50 TO AS 1111	MILD STEEL	GALV TO AS 1214	2
1	BRACKET 40 x 6 FLAT TO AS 3679	MILD STEEL	GALV TO AS 1650	TO SUIT

DIMENSIONS ARE IN MILLIMETRES



A ORIGINAL ISSUE	SUPPLY CAT NO 35025310	REFERENCE DRAWINGS	ROADS AND TRAFFIC AUTHORITY OF NSW TRAFFIC SIGNALS	SCALE 1 : 5 OR AS SHOWN		APPROVED: 15-09-98 T YUNG			
		BKT VERTICAL SMALL VT006-56		SUPERSEDES: -		MGR STANDARDS & QUALITY			
		BKT HORIZONTAL VT006-58		BRACKET VERTICAL SADDLE (LARGE) MOUNTING TO A TYPE 2 SIGNAL POST FOR 600mm - 900mm HIGH SIGNS	DRAWN RVC 07-09-98	ISSUE	A		
					CHECKED BWT 10-09-98				
					PASSED BRIAN TAYLOR 10-09-98	VT006-57			